

Reviewed for code compliance  
with IRC 2015  
Kitsap County Building Department  
lasmith@co.kitsap.wa.us  
11/16/2020

revised


BASIC PERMIT PACKAGE  
REVIEWED FOR CODE COMPLIANCE  
WITH IRC 2015  
KITSAP COUNTY BUILDING DEPARTMENT

Validity of permit. The issuance or granting of a permit shall not be  
constituted to be a permit for, or an approval of, any violation of any  
of the provisions of the International Codes or any other ordinance  
of Kitsap County. Permits presuming to give authority to violate or  
cancel the provisions of the International Codes and ordinances of  
Kitsap County shall not be valid. IRC & IRC 105

CHANGES  
MUST Be Approved Prior  
To Performing Work

Subject To Field Inspection

Must Comply With  
All Washington  
State Codes

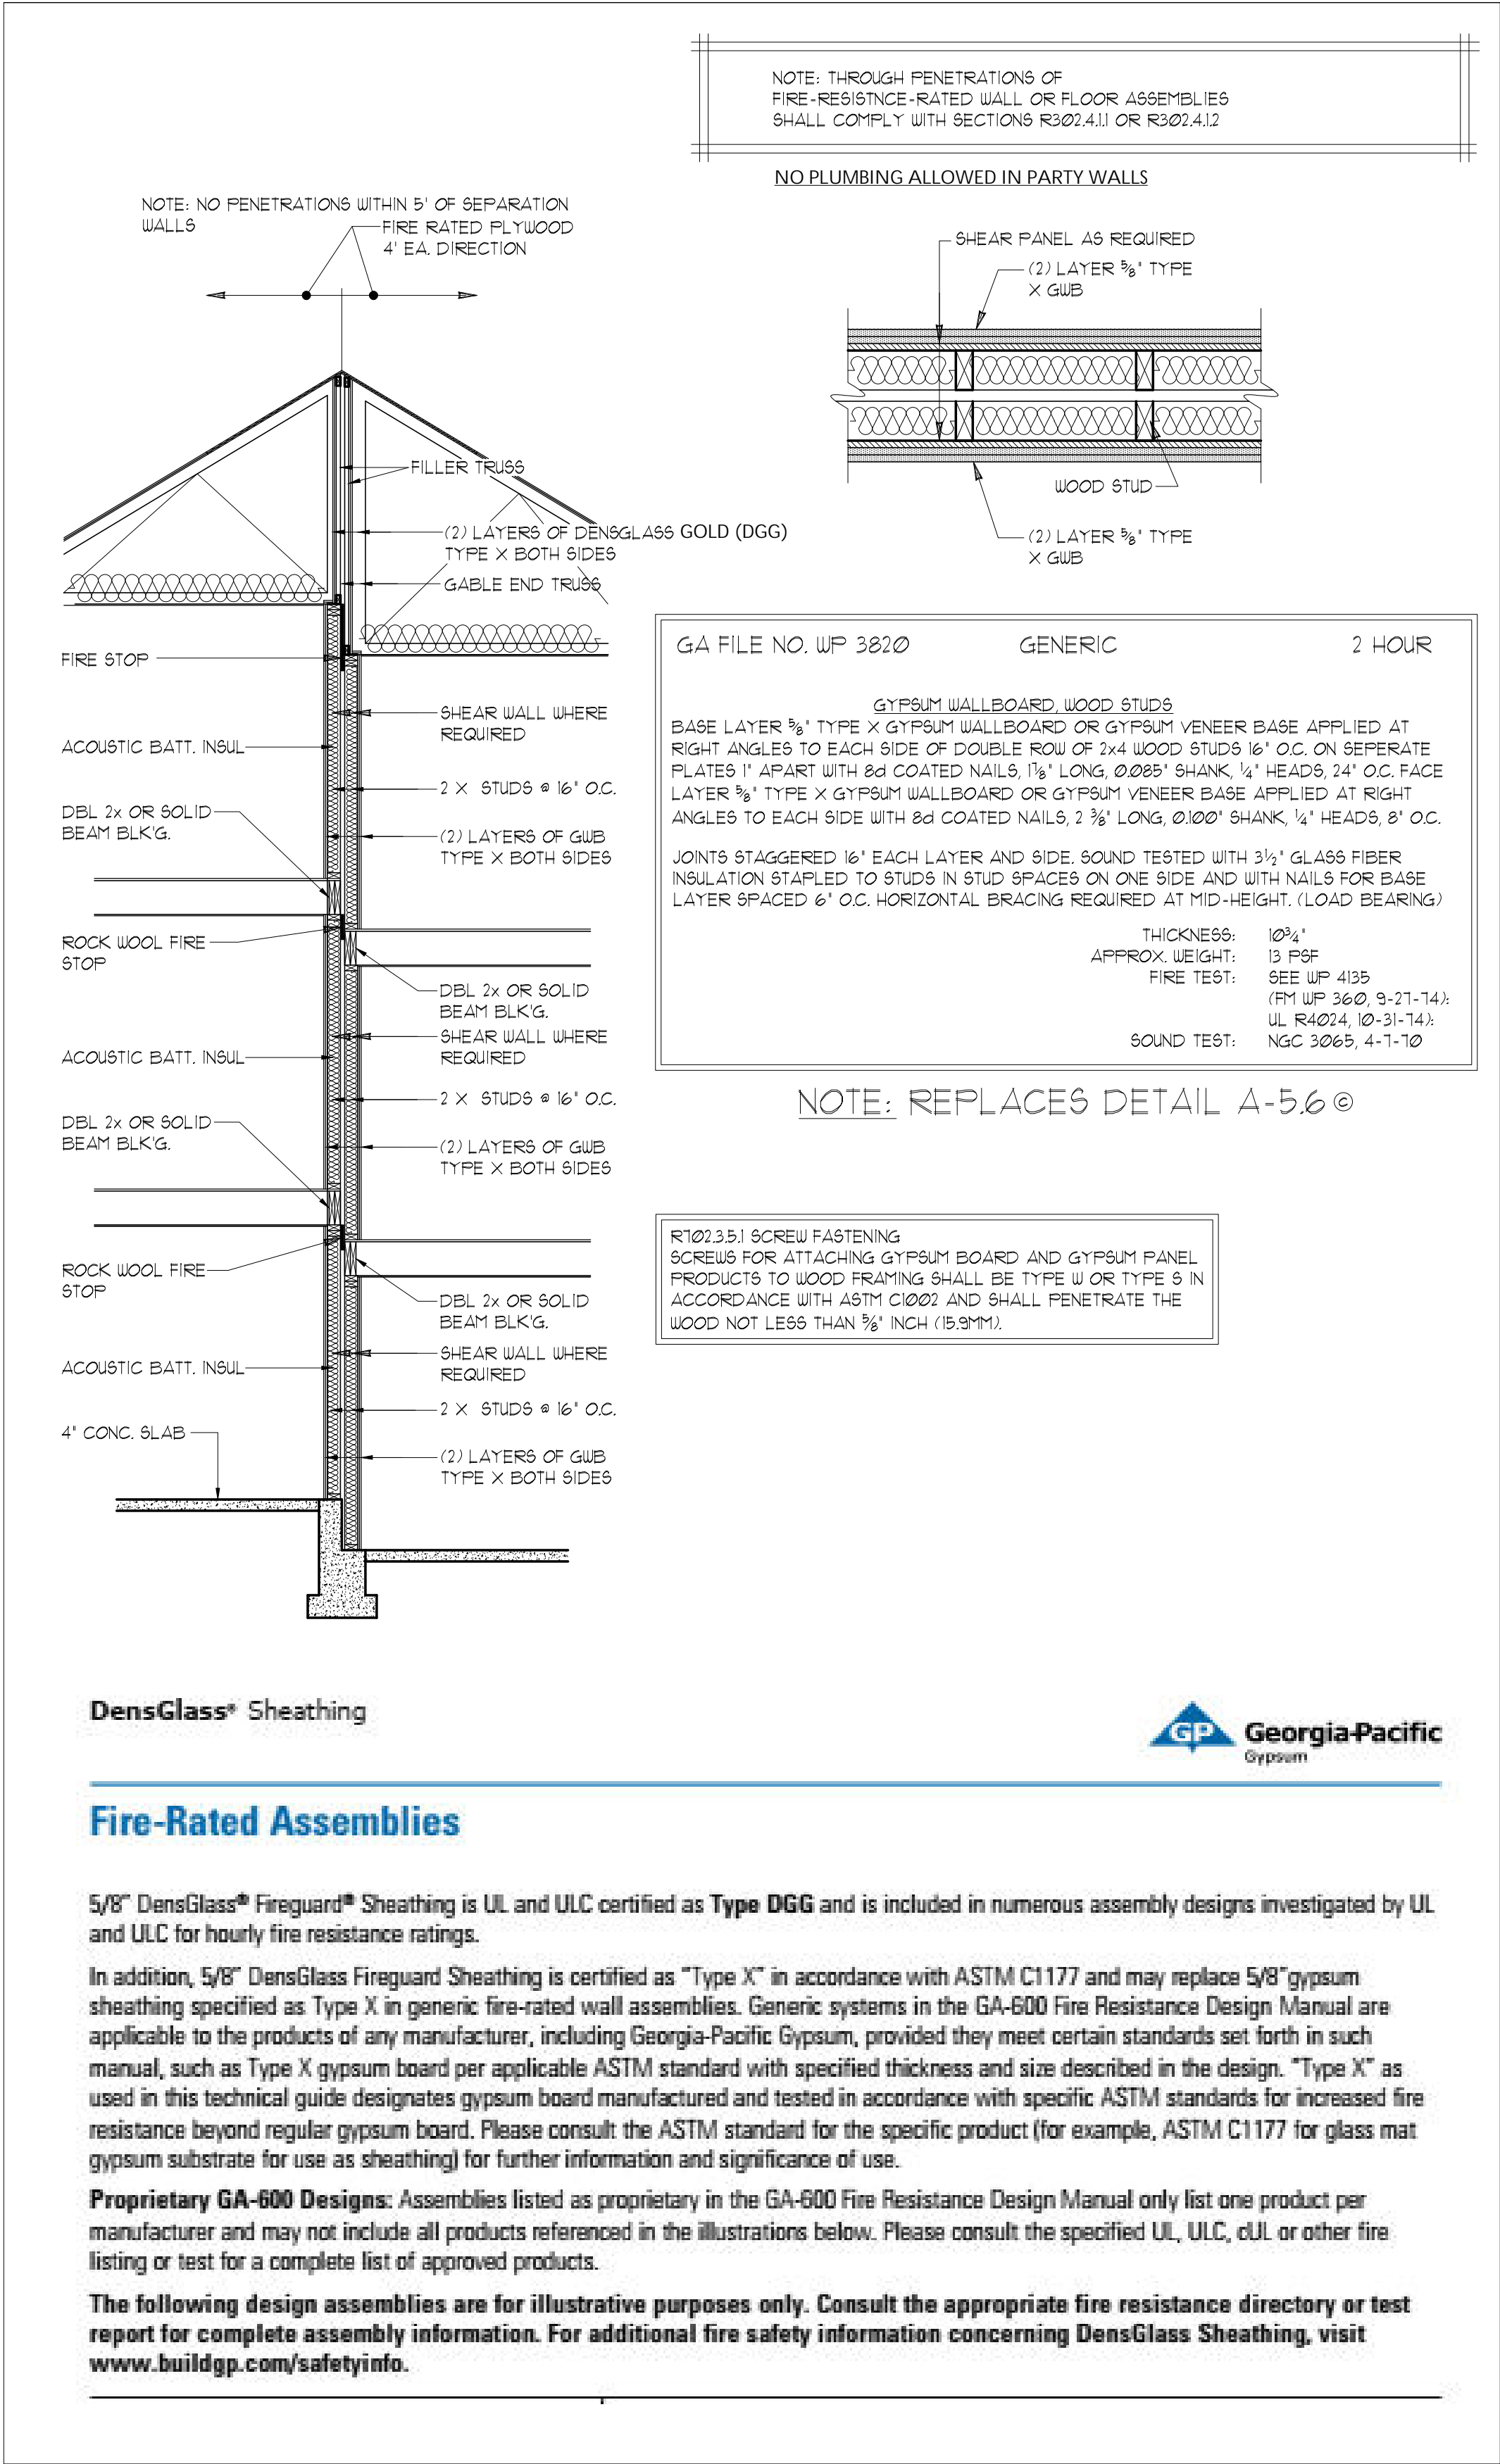

DensGlass® Sheathing



### Fire-Rated Assemblies

5/8" DensGlass® Fireguard® Sheathing is UL and ULC certified as **Type DGG** and is included in numerous assembly designs investigated by UL and ULC for hourly fire resistance ratings.

In addition, 5/8" DensGlass Fireguard Sheathing is certified as "Type X" in accordance with ASTM C1177 and may replace 5/8" gypsum sheathing specified as Type X in generic fire-rated wall assemblies. Generic systems in the GA-600 Fire Resistance Design Manual are applicable to the products of any manufacturer, including Georgia-Pacific Gypsum, provided they meet certain standards set forth in such manual, such as Type X gypsum board per applicable ASTM standard with specified thickness and size described in the design. "Type X" as used in this technical guide designates gypsum board manufactured and tested in accordance with specific ASTM standards for increased fire resistance beyond regular gypsum board. Please consult the ASTM standard for the specific product (for example, ASTM C1177 for glass mat gypsum substrate for use as sheathing) for further information and significance of use.

**Proprietary GA-600 Designs:** Assemblies listed as proprietary in the GA-600 Fire Resistance Design Manual only list one product per manufacturer and may not include all products referenced in the illustrations below. Please consult the specified UL, ULC, cUL or other fire listing or test for a complete list of approved products.



The following design assemblies are for illustrative purposes only. Consult the appropriate fire resistance directory or test report for complete assembly information. For additional fire safety information concerning DensGlass Sheathing, visit [www.buildgp.com/safetyinfo](http://www.buildgp.com/safetyinfo).

OPTIONAL 2-HOUR PARTY WALL ASSEMBLY

BUILDING SECTIONS

### REVISIONS

INT.	DATE	REV
-	-	-

DESIGNER:   
DRAFTER:   
DATE: 7/12/20  
PROJECT NO: 19198

SHEET NO:

OPTIONAL 2-HOUR PARTY WALL  
DETAIL

A-5.5A

Established Basic Permit #  
19-03671R2

Permit Number: 20-04896